


***CONDUCTIVE POLYMER HYBRID
ALUMINUM
ELECTROLYTIC CAPACITORS***





Application Guidelines

1. Polarity

The hybrid aluminum electrolytic capacitors is provided with positive and negative electrodes. Do not reverse the polarity when using. If it is used with the polarities reversed, its life may shorten because of increasing leakage current or short circuit.

2. Prohibited Circuits

Since problems can be expected due to leakage current increasing during soldering and other processes, capacitors cannot be used in the following circuits:

- (1) High impedance circuits
- (2) Coupling circuits
- (3) Time constant circuits
- (4) Connection of two or more capacitors in series for higher withstand voltage
- (5) Circuits to get bad influence by big leakage current

* In addition to the leakage current fluctuation above, the operational conditions such as characteristics at high and low temperature, damp heat and endurance stipulated in the specifications will affect the capacitance. The fluctuation of the capacitance may cause problem if it is used as a time constant capacitor, which is extremely sensitive to the fluctuation of the capacitance. Do not use it as a time constant capacitor. Additionally, please contact Taiwan Chinsan Electronic Industrial Co., Ltd. for usage of two or more capacitors in series for voltage proof.

3. Over-Voltage

Over voltage exceeding the rated voltage may not be applied even for an instant as it may cause a short circuit.

4. Charge and Discharge

Do not use standard hybrid to applications with rapid charge and discharge cycles. Consult us about capacitors specially designed for rapid charge-discharge cycles.

5. Soldering

The soldering conditions are to be within the range prescribed in the specifications. If the specifications are not followed, there is possibility of the appearance becoming defective and increase of abnormal leakage current and capacity reduction when soldering is conducted under conditions that are harsher than those stipulated.

Sufficient PCB installation space (PCB means Printed Circuit Board after this). Sealing resin of capacitors may have a bulge. The design must give consideration to the standard of height and lead position displacement given in the specifications.

6. Use of Capacitors for Industrial equipment's

To ensure reliability when the capacitors is used in industrial equipment's, design must allow for its capacitance, impedance and other characteristics.

7. Use of Capacitors for Equipment's regarding Human Life

In case of using in equipment's regarding human life (e.g. Space equipment, aeronautic equipment and atomic equipment etc.), be sure to talk over the matter with Taiwan Chinsan Electronic Industrial Co., Ltd. Don't use without recognition document of Taiwan Chinsan Electronic Industrial Co., Ltd.



8. Storage

- (1) Store capacitors with the temperature range between 15 to 35°C and the relative humidity of 75% or less without direct sunshine and store capacitors in the package states if possible.
- (2) Capacitors are recommended that you shall open the bag just before use and capacitors shall be used up.
- (3) Never store capacitors in which it is directly exposed to water, brine, oil or in condensation status.
- (4) Never store capacitors in any area filled with poisonous gases (including hydrogen sulfide, sulfurous acid, nitrous acid, chlorine and ammonia).
- (5) Never store capacitors in any area to which ultraviolet and/or radial rays are radiated.

9. Cleaning

Concerning about HCFC, higher alcohol system, petroleum system, terrene system, water system with surface active agent and other solvents the washing way (separateness or combinations) by soak, ultrasonic wave, boil, vapor etc. is confirmed under the maker's recommendation. Please contact us if you require further details.

10. Notes on Circuit designs for capacitors

10.1 Performance

Use capacitors within the rating and performance ranges defined in this specifications.

10.2 Operating temperature and ripple current

If capacitors is used at a temperature higher than the upper category temperature, or excess ripple current flows through capacitors, there are high possibilities of life cycle reduction or leakage current increasing to cause capacitors defective.

10.3 Leakage current

The leakage current of capacitors may increase slightly by soldering conditions. The application of DC voltage enables the capacitors to be repaired by itself and this leads the leakage current to be smaller gradually.

10.4 Applied voltage

For the reliability of capacitors, it is recommended that the voltage applied to the peak value of the ripple voltage should be less than the rated voltage.

10.5 Failure mode

The life ends mostly due to random failure mode, generally open circuit.

10.6 Insulation

Plastic coated case of capacitors can't guarantee the insulation. Do not use capacitors in areas requiring insulation.




11. Soldering condition for capacitors

11.1 Wave soldering condition for DIP type

Wave soldering	Temperature	Time
Preheating	125°C Max	Within 120 sec
Soldering condition	260+5°C Max	Within 10 sec

11.2 Reflow soldering condition for SMD type

Preheating	>217°C	>230°C	Peak Temp	Reflow times
150°C~180°C 120sec Max	50sec Max	40sec Max	260°C MAX	1 cycle only
			250°C MAX	2 cycles allowed

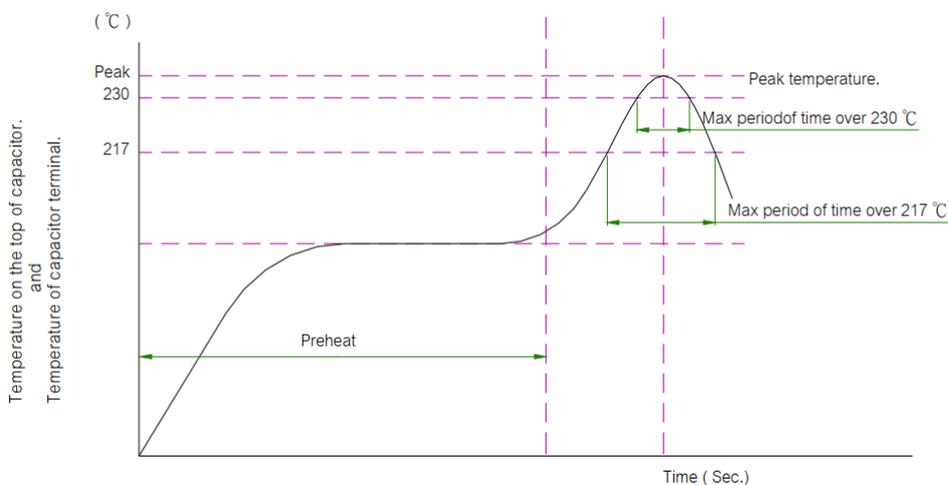

12. Catalogs

Specifications in the catalogs are subject to change without notice. The data shown in the catalogs are not assured as the whole performance values, but typical values.

For more details, refer to JEITA RCR-2367C (March 2019) with the title “Safety Application Guide for fixed aluminum electrolytic capacitors for use in electronic equipment”.

Capacitors can be comply with JIS C 0029-1989 testing standard with 10,000m flight height cabin environment with temperature control.

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS



◆ MARKING AND DATE CODE

Trade mark(Chinsan)

Trade Mark "CS"	Chinsan mark, Show on Dimension $\geq 8 \Phi$																																																									
<p>Code (Date Code)</p> <div style="display: flex; justify-content: space-around; margin-bottom: 5px;"> (1) (2) (3) </div> <table border="1" style="margin: 0 auto; border-collapse: collapse;"> <tr> <td style="padding: 2px 5px;">1</td> <td style="padding: 2px 5px;">1</td> <td style="padding: 2px 5px;">3</td> </tr> </table>	1	1	3	<p>(1)Week</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr style="background-color: #ADD8E6;"> <th>Code</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> </tr> </thead> <tbody> <tr> <td>Week</td> <td>The first week</td> <td>The second week</td> <td>The third week</td> <td>The fourth week</td> <td>The fifth week</td> </tr> </tbody> </table> <p>(2)Month</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr style="background-color: #ADD8E6;"> <th>Code</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> </tr> </thead> <tbody> <tr> <td>Month</td> <td>Jan</td> <td>Feb</td> <td>Mar</td> <td>Apr</td> <td>May</td> <td>Jun</td> </tr> <tr style="background-color: #ADD8E6;"> <th>Code</th> <th>7</th> <th>8</th> <th>9</th> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td>Month</td> <td>July</td> <td>Aug</td> <td>Sep</td> <td>Oct</td> <td>Nov</td> <td>Dec</td> </tr> </tbody> </table> <p>(3)Year</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr style="background-color: #ADD8E6;"> <th>Code</th> <th>9</th> <th>0</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> </tr> </thead> <tbody> <tr> <td>Year</td> <td>2019</td> <td>2020</td> <td>2021</td> <td>2022</td> <td>2023</td> <td>2024</td> </tr> </tbody> </table>	Code	1	2	3	4	5	Week	The first week	The second week	The third week	The fourth week	The fifth week	Code	1	2	3	4	5	6	Month	Jan	Feb	Mar	Apr	May	Jun	Code	7	8	9	X	Y	Z	Month	July	Aug	Sep	Oct	Nov	Dec	Code	9	0	1	2	3	4	Year	2019	2020	2021	2022	2023	2024
1	1	3																																																								
Code	1	2	3	4	5																																																					
Week	The first week	The second week	The third week	The fourth week	The fifth week																																																					
Code	1	2	3	4	5	6																																																				
Month	Jan	Feb	Mar	Apr	May	Jun																																																				
Code	7	8	9	X	Y	Z																																																				
Month	July	Aug	Sep	Oct	Nov	Dec																																																				
Code	9	0	1	2	3	4																																																				
Year	2019	2020	2021	2022	2023	2024																																																				
Series (Print Code)	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr style="background-color: #ADD8E6;"> <th>Series</th> <th>CTB</th> <th>CTC</th> <th>CTF</th> <th>CES</th> <th>CED</th> <th>CEE</th> <th>CHJ</th> <th>CSN</th> </tr> </thead> <tbody> <tr> <td>$\Phi 4 \sim \Phi 6.3$</td> <td>B</td> <td>C</td> <td>F</td> <td>S</td> <td>D</td> <td>E</td> <td>J</td> <td>N</td> </tr> <tr> <td>$\Phi 8 \sim \Phi 12.5$</td> <td>CTB</td> <td>CTC</td> <td>CTF</td> <td>CES</td> <td>CED</td> <td>CEE</td> <td>CHJ</td> <td>-</td> </tr> </tbody> </table>	Series	CTB	CTC	CTF	CES	CED	CEE	CHJ	CSN	$\Phi 4 \sim \Phi 6.3$	B	C	F	S	D	E	J	N	$\Phi 8 \sim \Phi 12.5$	CTB	CTC	CTF	CES	CED	CEE	CHJ	-																														
Series	CTB	CTC	CTF	CES	CED	CEE	CHJ	CSN																																																		
$\Phi 4 \sim \Phi 6.3$	B	C	F	S	D	E	J	N																																																		
$\Phi 8 \sim \Phi 12.5$	CTB	CTC	CTF	CES	CED	CEE	CHJ	-																																																		

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS



PART NUMBER SYSTEM

◆ Hybrid

Series	Rated Voltage	Capacitance	Tolerance	Lead Type	Lead Length	Case Dimension	Special Request
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)
<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

(1) Series

Series	FSA	BRA
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

(2) Rated Voltage

Code	1V	1H	1J	1K
WV	35	50	63	80

(3) Capacitance

Code	680	151
μF	68	150

(4) Capacitance Tolerance

Code	J	Q	R	K	V	M	H
%	± 5	+30 / -10	+20 / -0	± 10	+20 / -10	± 20	+20 / -5

(5) Lead Type

Code	N	C	P	H	J
Description	Long Lead	Cutting	Taping	Taping	Taping
Drawing	---	Fig 1	Fig 10,11	Fig 12	Fig 12

(6) Lead Length

Code	3	4	U	7	D	X	R	B	E	G	2	M	T	N
Length	3.5	4.5	5.5	7	4	2.3	2.5	2.8	3.1	3.3	2.5	3.5	3.8	+20mm min
Tolerance	±0.5			±0.2			±0.3			-15mm min				

Taping Code

Code	Z	2	3	7	5	S
Lead Pitch:+0.8/-0.2	2.0	2.5	3.5	3.5	5.0	5.0

(7) Case Dimension

DIP Code	0809	1010
Size	8×9	10×10
SMD Code	08A5	10A5
Size	8×10.5	10×10.5

(8) Special Request


Code	R	F	U	E
Description	High Rated Ripple Current	Endurance	Convex Rubber	Low ESR
Code	X	---	---	---
Description	Pitch 2.5mm	---	---	---

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS



FSA Series

- Low ESR at a high frequency range
- High ripple current capability
- Load life 4,000 hours at 125°C




◆ SPECIFICATIONS

Item	Performance Characteristics	
Category Temperature Range	-55 ~ +125°C	
Working Voltage Range	35 ~ 80Vdc	
Surge Voltage	Rated Voltage × 1.15	
Capacitance Range	33 ~ 270 μF	
Capacitance Tolerance	±20% (at 25°C and 120Hz)	
Dissipation Factor (tanδ)	See the standard ratings table (at 25°C, 120Hz).	
Leakage Current ※ 1	See the standard ratings table (Impress the rated voltage for 2 minutes)	
Low Temperature Characteristics Impedance Ratio	Z(-25°C)/Z(+20°C) ≤ 1.5 at 100KHz Z(-55°C)/Z(+20°C) ≤ 2.0 at 100KHz	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25°C after subjected to DC voltage with the rated ripple current is applied for 4,000 hours at 125°C.	
	Capacitance change	≦ ±30% of the initial value
	Dissipation factor(tanδ)	≦ 200% of the specified value
	ESR	≦ 200% of the specified value
	Leakage current	≦ specified value
Damp Heat (Steady State)	The following requirements shall be satisfied when the capacitor are restored to 25°C after exposing them for 1,000 hours at 85°C 85% RH.	
	Capacitance change	≦ ±30% of the initial value
	Dissipation factor(tanδ)	≦ 200% of the specified value
	Leakage current	≦ specified value
Other	Conforms to JIS-C-5101-18-2 (1999)	

◆ DIMENSIONS (mm)


◆ MARKING

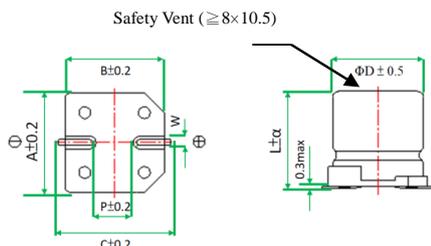

Code	Size	ΦD	L	α	A	B	C	W	P
08A5	8×10.5	8.0	10.5	0.5	8.3	8.3	9.0	0.7~1.1	3.2
10A5	10×10.5	10.0	10.5	0.5	10.3	10.3	11.0	0.7~1.1	4.6



◆ PART NUMBER SYSTEM (Example : 50V 68μF)

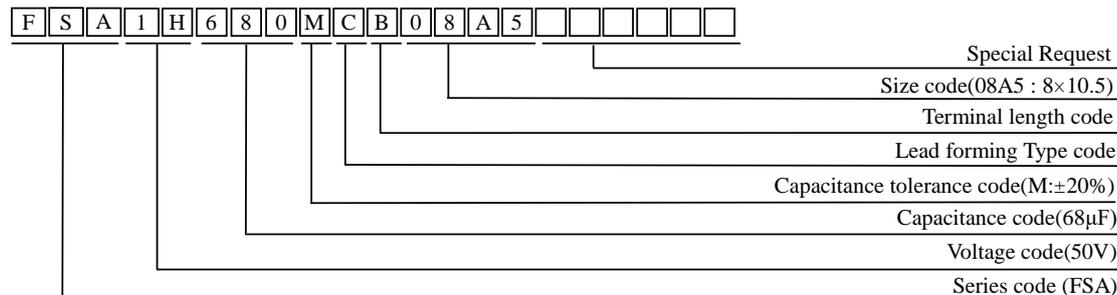

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS



FSA Series

◆ STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case Size (mm) ΦD×L	ESR 100~300KHz (mΩmax)	Rated Ripple current (mArms/ 125°C, 100KHz)	Tanδ max	Leakage Current (μA max)	Part Number
35 (1V)	150	8×10.5	27	1600	0.12	52.5	FSA1V151MCB08A5
	270	10×10.5	20	2000	0.12	94.5	FSA1V271MCB10A5
50 (1H)	68	8×10.5	30	1250	0.10	34	FSA1H680MCB08A5
	100	10×10.5	28	1600	0.10	50	FSA1H101MCB10A5
63 (1J)	33	8×10.5	40	1100	0.08	20.8	FSA1J330MCB08A5
	56	10×10.5	30	1400	0.08	35.3	FSA1J560MCB10A5
80(1K)	47	10×10.5	36	1360	0.08	37.6	FSA1K470MCB10A5

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS



BRA Series


- Low ESR at a high frequency range
- High ripple current capability
- Load life 4,000 hours at 125°C



◆ SPECIFICATIONS

Item	Performance Characteristics	
Category Temperature Range	-55 ~ +125°C	
Working Voltage Range	35 ~ 80Vdc	
Surge Voltage	Rated Voltage × 1.15	
Capacitance Range	33 ~ 270 μF	
Capacitance Tolerance	±20% (at 25°C and 120Hz)	
Dissipation Factor (tanδ)	See the standard ratings table (at 25°C, 120Hz).	
Leakage Current ※ 1	See the standard ratings table (Impress the rated voltage for 2 minutes)	
Low Temperature Characteristics Impedance Ratio	Z(-25°C)/Z(+20°C) ≤ 1.5 at 100KHz Z(-55°C)/Z(+20°C) ≤ 2.0 at 100KHz	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25°C after subjected to DC voltage with the rated ripple current is applied for 4,000 hours at 125°C.	
	Capacitance change	≦ ±30% of the initial value
	Dissipation factor(tanδ)	≦ 200% of the specified value
	ESR	≦ 200% of the specified value
	Leakage current	≦ specified value
Damp Heat (Steady State)	The following requirements shall be satisfied when the capacitor are restored to 25°C after exposing them for 1,000 hours at 85°C 85% RH.	
	Capacitance change	≦ ±30% of the initial value
	Dissipation factor(tanδ)	≦ 200% of the specified value
	Leakage current	≦ specified value
Other	Conforms to JIS-C-5101-4-1 (1998)	

◆ DIMENSIONS (mm)

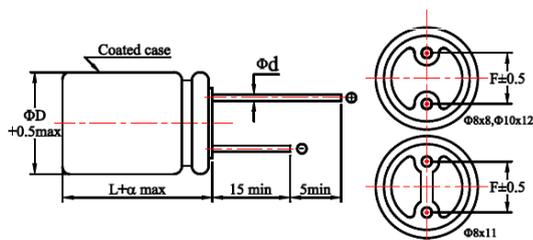

◆ LEAD


Code	ΦD	Φd	L	α	F
0809	8	0.6	9.0	1.5	3.5
1010	10	0.6	10.0	1.5	5.0

◆ MARKING



◆ PART NUMBER SYSTEM (Example : 50V 68μF)

B R A 1 H 6 8 0 M N N 0 8 0 9

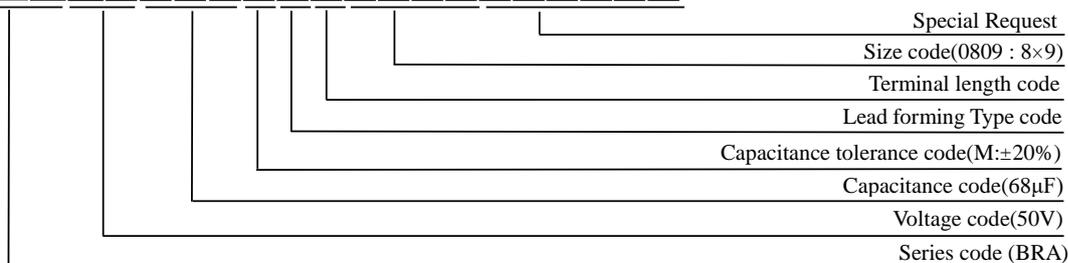

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS



BRA Series

◆ STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case Size (mm) ΦD×L	ESR 100~300KHz (mΩmax)	Rated Ripple current (mA rms/ 125°C, 100KHz)	Tanδ max	Leakage Current (μA max)	Part Number
35 (1V)	150	8×9	27	1600	0.12	52.5	BRA1V151MNN0809U
	270	10×10	20	2000	0.12	94.5	BRA1V271MNN1010U
50 (1H)	68	8×9	30	1250	0.10	34	BRA1H680MNN0809U
	100	10×10	28	1600	0.10	50	BRA1H101MNN1010U
63 (1J)	33	8×9	40	1100	0.08	20.8	BRA1J330MNN0809U
	56	10×10	30	1400	0.08	35.3	BRA1J560MNN1010U
80(1K)	47	10×10	36	1360	0.08	37.6	BRA1K470MNN1010U